


SUBDIVISION OF LAND

90 Attachment 4

Town of Greenfield

Typical Road Cross Section

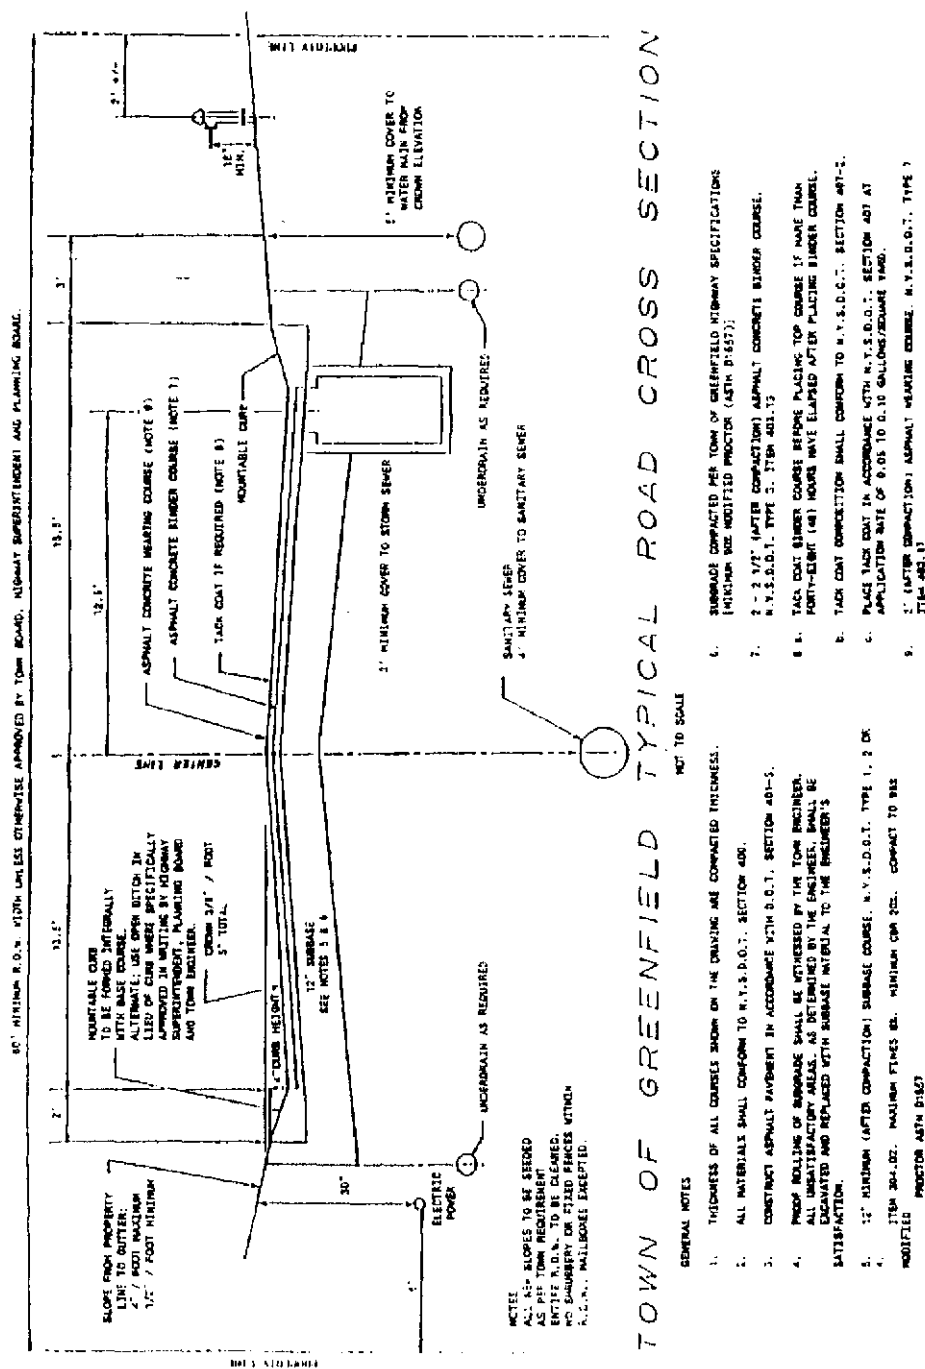

TOWN OF GREENFIELD TYPICAL ROAD CROSS SECTION

- GENERAL NOTES
1. THICKNESS OF ALL COURSES SHOWN ON THE DRAWING ARE COMPACTED THICKNESS.
 2. ALL MATERIALS SHALL CONFORM TO N.Y.S.D.O.T. SECTION 400.
 3. CONSTRUCT ASPHALT PAVEMENT IN ACCORDANCE WITH D.O.T. SECTION 401-5.
 4. PPOC BOLLINGS OF SUBGRADE SHALL BE UNCOVERED BY THE TOWN ENGINEER. ALL UNSATISFACTORY AREAS AS DETERMINED BY THE ENGINEER SHALL BE EXCAVATED AND REPLACED WITH SUBGRADE MATERIAL TO THE ENGINEER'S SATISFACTION.
 5. 12" MINIMUM (AFTER COMPACTION) SUBGRADE COURSE. N.Y.S.D.O.T. TYPE 1, 2 OR 3.
 6. 175# 204-02. MAXIMUM FINES 8%. MINIMUM GR# 200. COMPACT TO 95% MODIFIED PROCTOR ASTM D-1557.
 7. 12" (AFTER COMPACTION) ASPHALT WEARING COURSE. N.Y.S.D.O.T. TYPE 1, 2 OR 3.
 8. TACK COAT COMPACTED SHALL CONFORM TO N.Y.S.D.O.T. SECTION 407-2.
 9. TACK COAT BINDER COURSE RESERVE PAVING TOP COURSE IF WARE THAN PORTLAND CEMENT (48) HOURS HAVE ELAPSED AFTER PAVING BINDER COURSE.
 10. PLACE TACK COAT IN ACCORDANCE WITH N.Y.S.D.O.T. SECTION 407-2. APPLICATION RATE OF 9.08 TO 0.10 GALLONS/SQUARE YARD.
 11. 3" (AFTER COMPACTION) ASPHALT BINDER COURSE. N.Y.S.D.O.T. TYPE 1, 2 OR 3.
 12. SUBGRADE COMPACTED PER TOWN OF GREENFIELD HIGHWAY SPECIFICATIONS (MINIMUM SIZE MODIFIED PROCTOR (ASTM D-1557)).
 13. 2" - 2 1/2" (AFTER COMPACTION) ASPHALT CONCRETE BINDER COURSE. N.Y.S.D.O.T. TYPE 5. ITEM 401.13
 14. 2" - 2 1/2" (AFTER COMPACTION) ASPHALT CONCRETE WEARING COURSE. N.Y.S.D.O.T. TYPE 5. ITEM 401.13
 15. TACK COAT BINDER COURSE RESERVE PAVING TOP COURSE IF WARE THAN PORTLAND CEMENT (48) HOURS HAVE ELAPSED AFTER PAVING BINDER COURSE.
 16. TACK COAT COMPACTED SHALL CONFORM TO N.Y.S.D.O.T. SECTION 407-2.
 17. PLACE TACK COAT IN ACCORDANCE WITH N.Y.S.D.O.T. SECTION 407-2. APPLICATION RATE OF 9.08 TO 0.10 GALLONS/SQUARE YARD.
 18. 3" (AFTER COMPACTION) ASPHALT WEARING COURSE. N.Y.S.D.O.T. TYPE 1, 2 OR 3.
 19. TACK COAT COMPACTED SHALL CONFORM TO N.Y.S.D.O.T. SECTION 407-2.
 20. TACK COAT BINDER COURSE RESERVE PAVING TOP COURSE IF WARE THAN PORTLAND CEMENT (48) HOURS HAVE ELAPSED AFTER PAVING BINDER COURSE.
 21. 2" - 2 1/2" (AFTER COMPACTION) ASPHALT CONCRETE BINDER COURSE. N.Y.S.D.O.T. TYPE 5. ITEM 401.13
 22. SUBGRADE COMPACTED PER TOWN OF GREENFIELD HIGHWAY SPECIFICATIONS (MINIMUM SIZE MODIFIED PROCTOR (ASTM D-1557)).